

Huawei MiFi Setup

Most of the time SIM cards will auto populate all the relevant needed once the SIM has been inserted and given a few minutes to configure.

In cases where this doesn't happen, please follow the below instructions.

The first step is to connect to the MiFi with your laptop or computer, this can be done with a provided USB cable or wirelessly like you would connect to a WiFi network.

Use the SSID and WiFi key to log onto the device, these details will be on the back of the device or displayed on the screen.


Once you are connected, please open an Internet browser, then navigate to the one of the following pages.

<http://192.168.1.1> or <http://192.168.8.1>

This will take you to the Huawei dashboard, select Settings and you will be prompted for a username and password. The username is **admin** and **fleet1** for the password.

From the settings menu go to Dial-up > Profile Management.

(This is an example, your APN may be different)

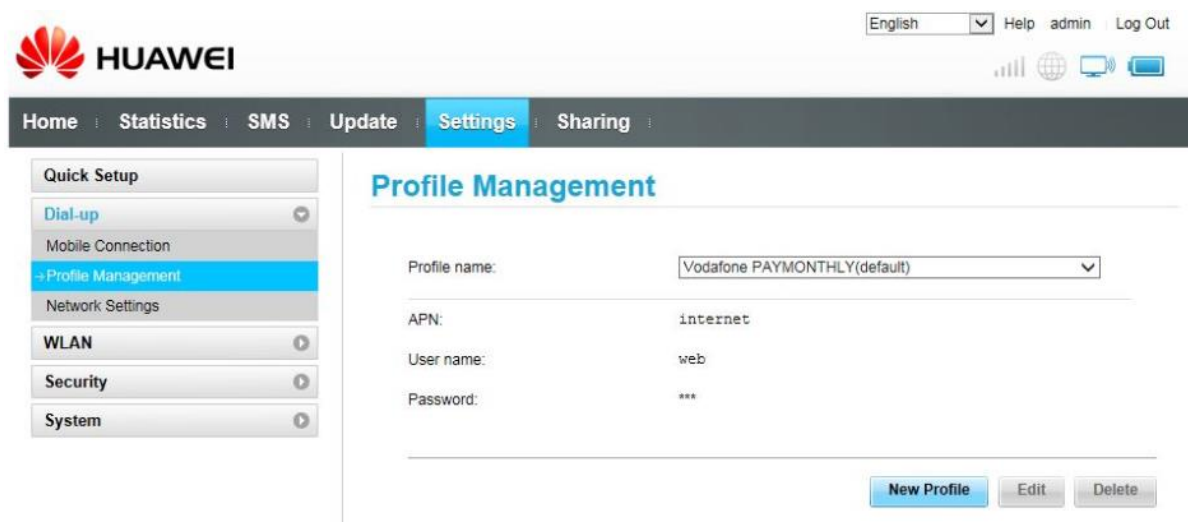

The screenshot shows the Huawei MiFi web interface. At the top, there is a navigation bar with the Huawei logo, the word "HUAWEI", and a language dropdown set to "English". Below this is a secondary navigation bar with links: Home, Statistics, SMS, Update, Settings (highlighted), and Sharing. On the left side, there is a sidebar menu with options: Quick Setup, Dial-up (with a dropdown arrow), Mobile Connection, Profile Management (highlighted with a blue bar and a right-pointing arrow), Network Settings, WLAN, Security, and System. The main content area is titled "Profile Management" and contains a form with the following fields: Profile name (dropdown menu showing "Vodafone PAYMONTHLY(default)"), APN (text field with "internet"), User name (text field with "web"), and Password (text field with "***"). At the bottom right of the form, there are three buttons: "New Profile", "Edit", and "Delete".

Check the APN profile that is applied, it should match the instructions sent with the SIM.

If the APN is not correct, select new profile and enter the correct details.

The APN details for your devices should be as follows.

The profile name does not have a requirement, we recommend something that you recognise as your SIM.


APN – object-connected.fr

Username – leave blank

Password – leave blank

It is also worth checking the Network Settings under the Dial-up menu to check these have been configured correctly.

Both options should show as Auto like the below image.

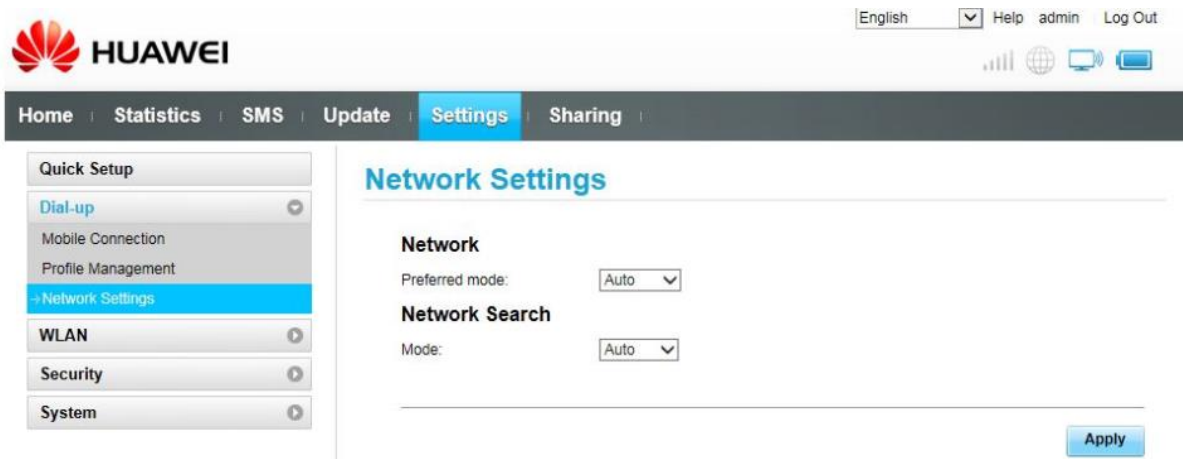

This enables the MiFi to switch between available frequencies, so if you leave a 4G area it will automatically switch to 3G if there is a better signal.

Once these details are entered you should be able to establish a data connection.

If you do have any further problems, try switching off the device and removing the SIM and re-inserting it, then boot the device back up.